

# LINDA MARKET LIGHTING FIXTURE 20W




**50 cm**



## General Application Areas



Markets



Factories



Sports Halls



Airports



Office


## Information

Linda Series Market Lighting Fixture is designed to replace traditional products with fluorescent light source, especially in grocery stores, industrial plants, warehouses and sports facilities with ceiling heights from 2.5m to 6 meters.

LED light source food lighting fixtures showcase your products at their best by highlighting their colors and textures to make them look fresh, tasty and attractive. It has been determined that UV or color enhancing filters are not effective in preventing food from changing color, but our fixtures designed with LED technology display your food in the most effective way without exposure to UV or infrared rays. By appealing to the visual perception of your customers, you can preserve the freshness of your products and increase your sales.

The better your food looks, the fresher, tastier, more attractive and appetizing it is perceived. Our led food lighting fixtures show your product with the best color rendering ratio. It allows you to present it in a way that you can almost taste it by highlighting its colors and textures. In this way, by appealing to the visual perception of your customers, you can enable your customers to buy even the products that are not on their list and increase your turnover.

## Optical Beam Angles

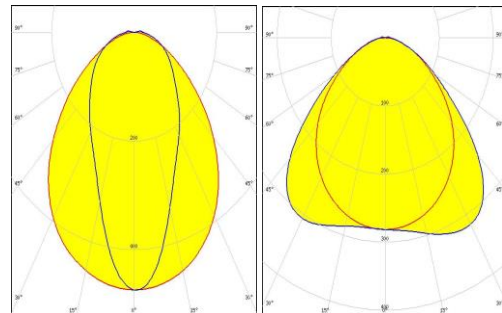


F16636\_LINDA-W60

60° + 90°

F16747\_LINDA-WWW

110° - 100°

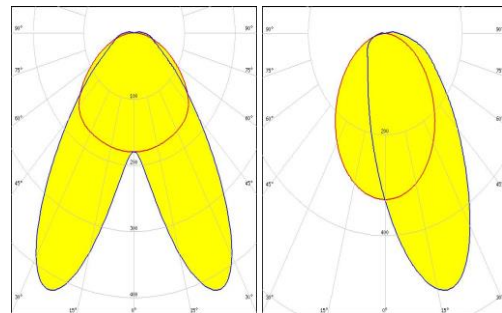

F16858\_LINDA-Z2T25

Double asymmetric

F16859\_LINDA-ZT25

Asymmetric




## Technical Specifications

<b>Body</b>	:Aluminum Extrusion
<b>IP Protection Class</b>	:IP 40
<b>Luminous Flux</b>	:2500 lm
<b>Light Source</b>	:LED
<b>Test Standards</b>	:TS EN 60598TS, EN 60529, TS EN 62031TS, EN 62262, TS IEC TR 62471TS, EN 62722-2-1

## Optical and Electrical Properties

<b>Power</b>	20W	<b>Light Angle</b>	60°/90°/100°/110°/ASM./D.ASM.
<b>CE Marks</b>	Yes	<b>Power Factor</b>	>0,9
<b>Optic</b>	PMMA / PC	<b>Max Voltage Withstand</b>	2kV
<b>Effectiveness Factor</b>	125 lm/W	<b>Color Temperature</b>	3000K/4000K/6500K
<b>Input Voltage</b>	200-240 V AC 50/60 HZ	<b>CRI</b>	>80
<b>Total Harmonic Distortion</b>	<%15	<b>Input Voltage</b>	200-240 V AC 50/60 HZ
<b>Dimensions</b>	505x40x45 mm	<b>Weight</b>	

## Technical Drawing (Side View) and Connection Diagram

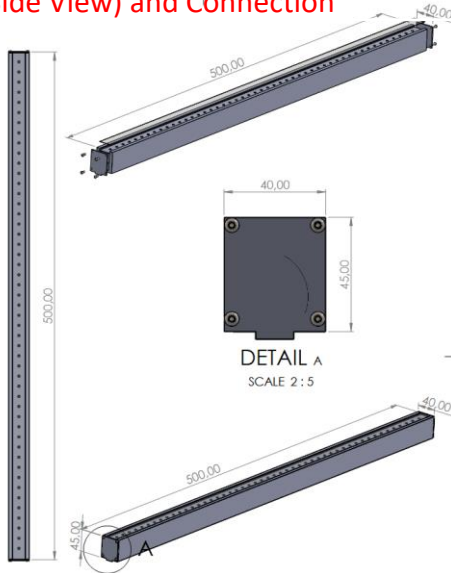

## Product Variations»

Product Code	Power	Input Voltage	CCT	Luminous Flux	Light Angle	Dimensions	Area of Use
LND-020PM-00601-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	60°	1005X40X45mm	Pendant
LND-020PM-00901-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	90°	1005X40X45mm	Pendant
LND-020PM-01001-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	100°	1005X40X45mm	Pendant
LND-020PM-01101-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	110°	1005X40X45mm	Pendant
LND-020PM-ASY1-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	ASM.	1005X40X45mm	Pendant
LND-020PM-DASY1-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	D.ASM.	1005X40X45mm	Pendant
LND-020SM-00601-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	60°	1005X40X45mm	Surface Mounted
LND-020SM-00901-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	90°	1005X40X45mm	Surface Mounted
LND-020SM-01001-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	100°	1005X40X45mm	Surface Mounted
LND-020SM-01101-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	110°	1005X40X45mm	Surface Mounted
LND-020SM-ASY1-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	ASM.	1005X40X45mm	Surface Mounted
LND-020PM-DASY1-840-9016	20W	200-240 V AC 50/60 Hz	3000K/4000K/6500K	2500m	D.ASM.	1005X40X45mm	Surface Mounted