


# Heka Projector 400W



## General Application Areas

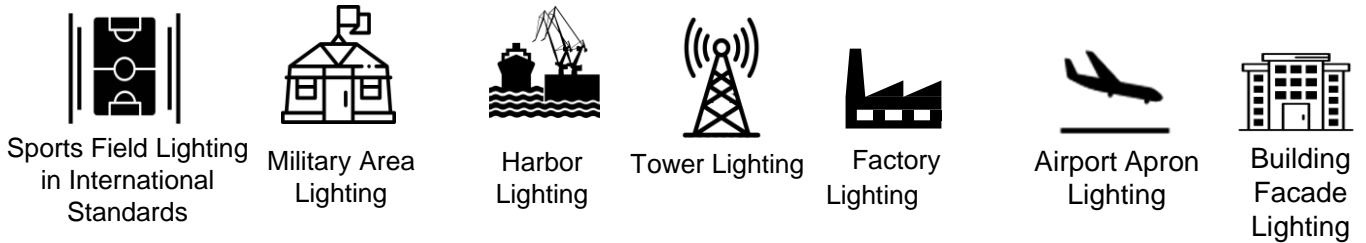


## General Information

### Compliant with 4K TV Broadcast and Shooting Standards

Optional Anti-glare visor.  
Excellent Surface Quality  
Flicker Free  
CRI 70 / 80 / 90 & TLCI

## Optical Beam Angles

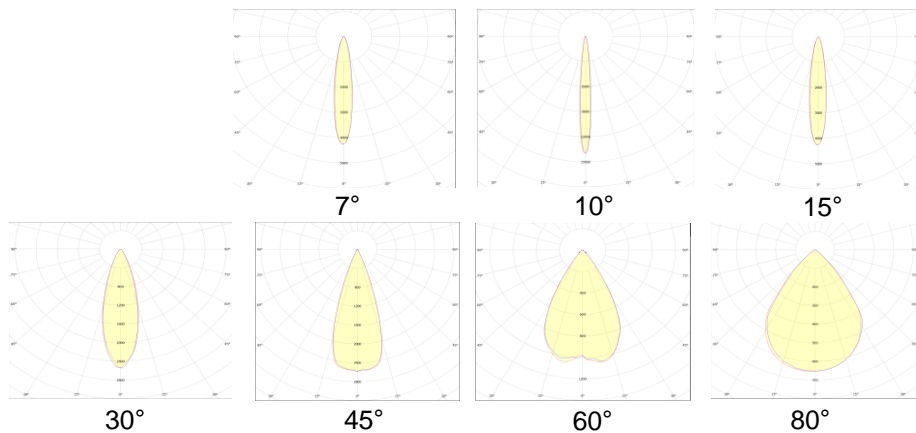


# Heka Projector 400W

## Technical Specifications

<b>Model</b>	: Rigel		
<b>Power</b>	:400W		
<b>Input Voltage</b>	:100-277V AC 50/60Hz		
<b>Power Coefficient</b>	:0,98		
<b>Lumen</b>	:>52000		
<b>Number of Led</b>	128 Pcs / SMD 5050 or 3535 High Power	<b>Light Color</b>	3000-4000-5000-6500K
<b>Color Rendering (CRI)</b>	70/80/90 Optional	<b>Led LM80(L70) Lifetime</b>	>60.000 Hours
<b>Operating Temperature</b>	-30 / +55°C	<b>Lens Angle</b>	7°-10°-15°-30°-45°-60°-80°
<b>Ip Protection Class</b>	IP66 Outdoor	<b>Body Material</b>	Aluminum Injection
<b>Front Section</b>	4mm Tempered Glass	<b>Mounting Foot Screw Diameter</b>	10 or 12 mm
<b>Mounting Foot 2 Screw Spacing</b>	20 cm	<b>Weight</b>	13 kg
<b>Dimensions</b>	53,1 x 37,7 x 13,4 cm	<b>Test Standards</b>	EN 60598-1, EN 60598-2-5

\* Lumen values are given for CRI 70.

## Technical Drawing (Side View) and Connection Diagram

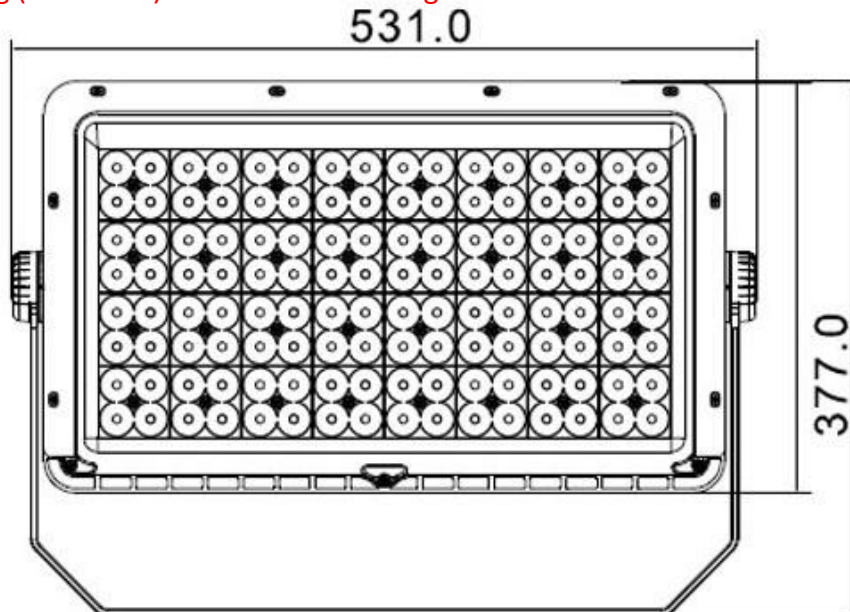

## Product Images

