

ANTARES Infrared LED Floodlight 103 W



General Application Areas

Optical Beam Angles




Imaging Systems




ANPR

General Information


The Antares LED Floodlight is an LED-based lighting device used to support red violation systems. Its energy-efficient red light has been optimized for night vision. The luminaire body is engineered to withstand outdoor conditions. It has an 10° light angle for red violation, license plate reading, and other roadway detection systems. It offers options for 17°, 25°, 40°, 45°, 60°, 90°, and 120°, suitable for various applications.




10°




17°




25°




40°




45°



60°



90°



120°

ANTARES Infrared LED Floodlight 103 W

Technical Specifications

Body	: Aluminum Injection
Color Options	: RAL 9004
IP Protection Class	: IP 66
Front Cover	: Tempered Glass
Light source	: LED
Lens	: PMMA
Test Standards	: TS EN 60598-1, TS EN 60598-2-5, TS EN 62031, TS EN 62262, TS IEC TR 62471, TS EN 62722-2-1

Optical and Electrical Properties

Power	103W	Total Harmonic Distortion	<%20
Wavelength	850nm	Power Factor	>0,95
Throttling Options:	1-10V, TRIAC, DALI	Infrared Emission	43 W
Light Angle	10°, 17°, 25°, 40°, 45°, °60°, 90°, 110°	Weight	4.5 kg
Input Voltage	200-240 V AC 50/60 Hz	Dimensions	445,4x392,5x56,8 mm

Other Features


Operating Temperature	-25°/+55°C	CE Marking	Yes
Impact Resistance Class	IK 08	RoHS Compliance	Yes
Lifetime	≥30,000 Hours	Warranty Period	3 Years

Properties

- Ideal for Traffic Application.
- Extra long life with very low maintenance.
- IP66 Enclosure for Outdoor Mounting.
- Compact with integrated LED Light Source.
- The pulse range can be adjusted from 1.6K~30KHz.
- Standalone or External trigger
- Synchronized support with camcorde (NTSC&PAL)
- Super long range up to 200-400 m.

ANTARES Infrared LED Floodlight 103 W

Technical Drawing (Side View) and Wiring Diagram

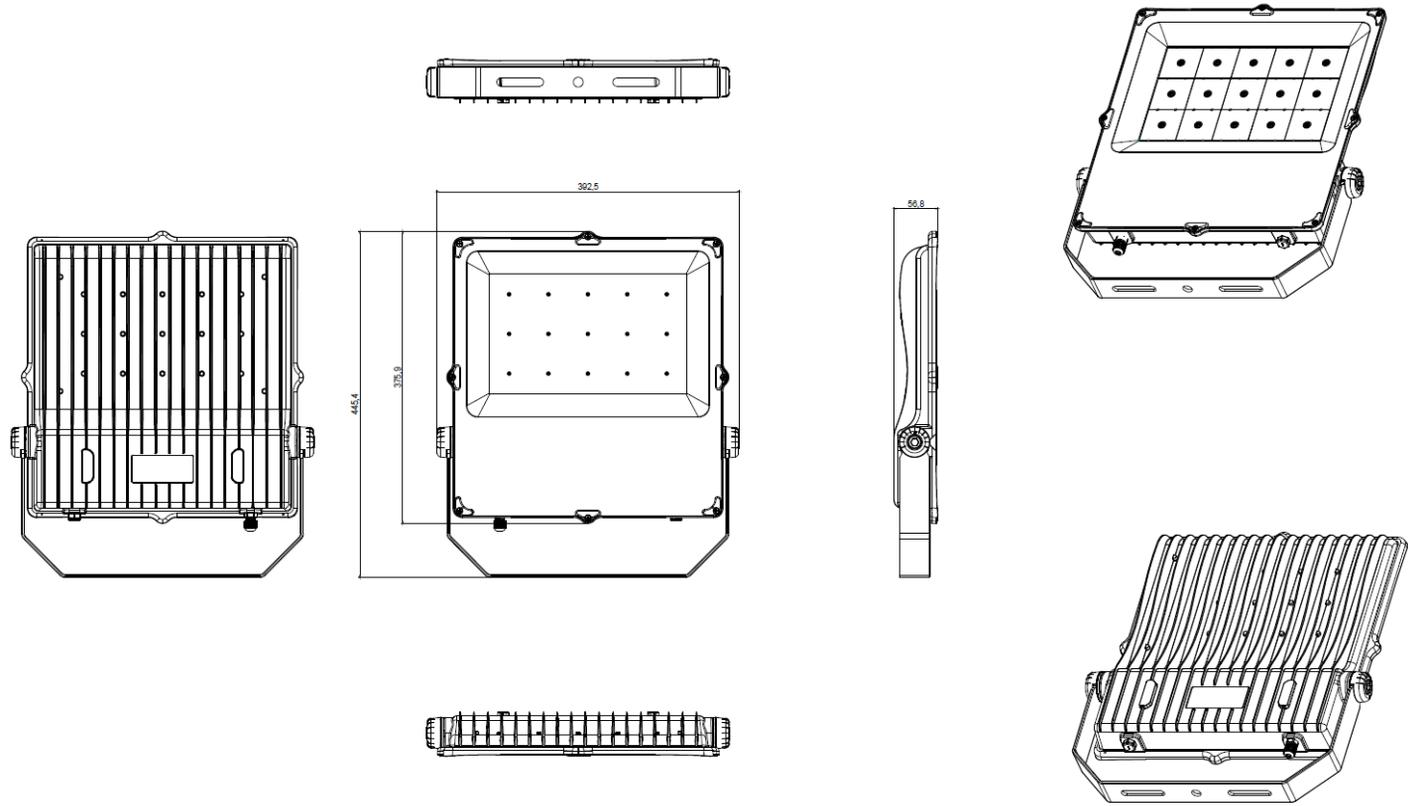

Product Variations

Product Code	Power	Input Voltage	Infrared Emission	Wavelength	Light Angle	Dimensions	Weight
ANT-103SM-00102-850-9004	103 W	200-240 V AC 50/60 Hz	43 W	850 nm	10°	445,4x392,5x56,8 mm	4.5kg
ANT-103SM-00172-850-9004	103 W	200-240 V AC 50/60 Hz	43 W	850 nm	17°	445,4x392,5x56,8 mm	4.5kg
ANT-103SM-00252-850-9004	103 W	200-240 V AC 50/60 Hz	43 W	850 nm	25°	445,4x392,5x56,8 mm	4.5kg
ANT-103SM-00402-850-9004	103 W	200-240 V AC 50/60 Hz	43 W	850 nm	40°	445,4x392,5x56,8 mm	4.5kg
ANT-103SM-00452-850-9004	103 W	200-240 V AC 50/60 Hz	43 W	850 nm	45°	445,4x392,5x56,8 mm	4.5kg
ANT-103SM-00602-850-9004	103 W	200-240 V AC 50/60 Hz	43 W	850 nm	60°	445,4x392,5x56,8 mm	4.5kg
ANT-103SM-00902-850-9004	103 W	200-240 V AC 50/60 Hz	43 W	850 nm	90°	445,4x392,5x56,8 mm	4.5kg
ANT-103SM-01202-850-9004	103 W	200-240 V AC 50/60 Hz	43 W	850 nm	120°	445,4x392,5x56,8 mm	4.5kg