

CENTRO L LIGHTING POLE

7-11 M

odak® R&D CENTER
smart city technologies



7-11 M



General Application Areas



Walking Path



Parks and Recreation Areas



Outdoor Lighting



Shopping Mall Gardens and Entrances



Outdoor Parking Areas



Industrial Facility Environments



Street and Street Lighting




Bicycle Paths

General Information


CENTRO L light poles are specifically designed for areas that require unidirectional and controlled light distribution. Thanks to the 15°, 30° and 90° arm angles, the light direction can be optimized according to the path width and lighting needs. These angle options ensure that the light is directed to the right point, providing uniform illumination and high visual comfort.

L type poles with 7, 8, 9, 10 and 11 meter height alternatives; It easily adapts to different applications such as pedestrian paths, streets, parking areas and site perimeters. Offering high energy efficiency with LED technology, these systems reduce operating costs thanks to their low energy consumption and long-lasting structures, while contributing to urban aesthetics with their durable and modern design.


Optical Beam Angles




30°




60°




90



ASY



ASY



64° - 150°

CENTRO L LIGHTING POLE

7-11 M



Optics and Lighting Performance

Color Temperature (CCT)	: LED
Color Rendering (CRI)	: 3000K, 4000K, 5000K and 6500K
Effectiveness Factor	: >70 CRI
Lumen Efficiency	: 130 lm/W
Light Angle	: 5590 lm / 11180 lm
Color Temperature (CCT)	: 30°, 60° 90°, 64° - 150° and Asymmetric

Electrical Specifications

Consumption Power	: 43W, 86W
Input Voltage	: 220-240V AC, 50/60 Hz

Body Structure and Assembly

Body	Chromate-Plated Aluminum Body
Mast Height Options	7 mt - 8 mt - 9 mt – 10 mt – 11 mt

Body Structure and Assembly

IP Protection Class	IP66
Impact Resistance	IK06

Arm Angle Options 90°

Operating Temperature -20 °C ile +45 °C


Paint	Electrostatic Powder Oven Paint	LED Lifespan	60,000 hours
Mounting	Available with Flanged Base and Ground Connection Anchors Suitable for Ground Mounting	Warranty	2 Years

Visit Our Website for Detailed Product Variations



CENTRO L LIGHTING POLE

7-11 M

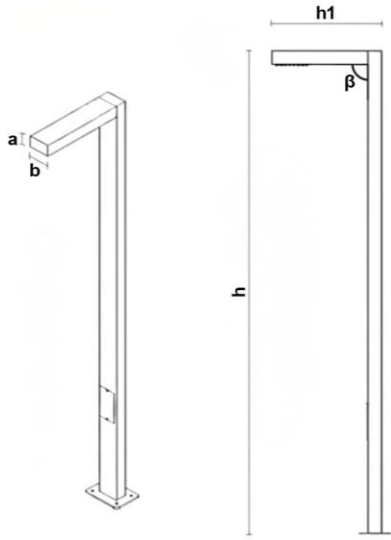


Length

a	b	h	h1	β
120	120	7000	1827	15°
120	120	7000	2038	30°
120	120	7000	1765	90°
120	120	8000	2008	15°
120	120	8000	2240	30°
120	120	8000	1940	90°
120	120	9000	2189	15°
120	120	9000	2442	30°
120	120	9000	2115	90°
120	120	10000	2370	15°
120	120	10000	2644	30°
120	120	10000	2290	90°
120	120	11000	2551	15°
120	120	11000	2846	30°
120	120	11000	2465	90°


Base Flanges & J Anchors Details

Mast Length	Flange Size (mm)	Flange Thickness (t)	Anchor Type & MOQ	Anchor Length (L)	Foundation Measure (Po=1)
7 Meters	250 x 250	10 mm	4 x M16 (J Anchor)	500 mm	800 x 800 x 800 mm
8 Meters	250 x 250	10 mm	4 x M16 (J Ankraj)	500 mm	1000 x 1000 x 1000 mm
9 Meters	250 x 250	10 mm	4 x M16 (J Ankraj)	500 mm	1000 x 1000 x 1000 mm
10 Meters	300 x 300	12 mm	4 x M16 (J Ankraj)	500 mm	1000 x 1000 x 1000 mm
11 Meters	300 x 300	12 mm	4 x M16 (J Ankraj)	500 mm	1000 x 1000 x 1000 mm


FLANGE 250x250 (t=10 mm)

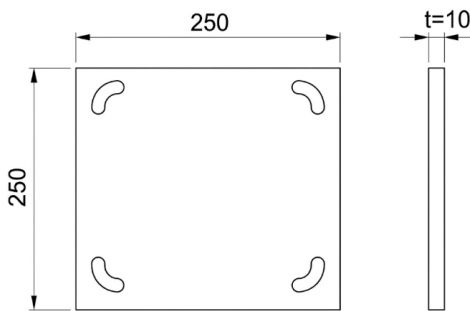


FLANGE 300x300 (t=12 mm)

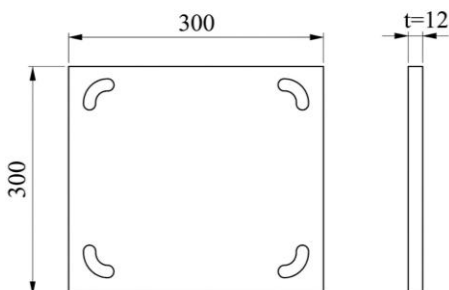

M16 J-ANCHOR BOLT ASSEMBLY DETAIL

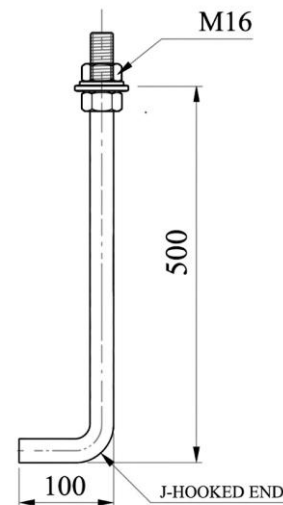

MOUNTING AND FOUNDATION DETAIL (EXAMPLE)

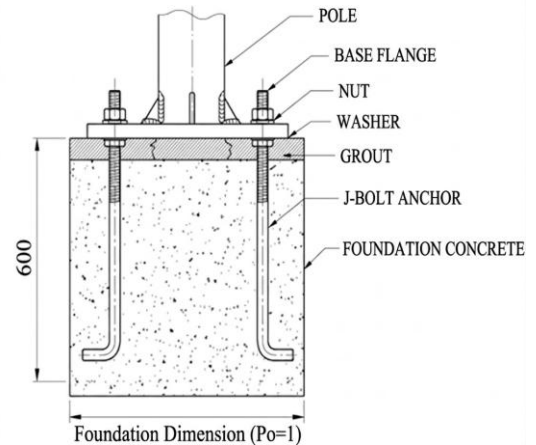

FOUNDATION DIMENSIONS (Po=1)

3 m	: 400x400x500 mm
4 m	: 400x400x500 mm
5 m	: 500x500x600 mm
6 m	: 800x800x800 mm
8 m	: 1000x1000x1000 mm
10 m	: 1000x1000x1000 mm
12 m	: 1000x1000x1000 mm

