

COVE LED



General Application Areas




Concealed
Lighting

General Information

The Cove LED series seamlessly integrates aesthetic appeal with functional efficiency, making it an ideal solution for contemporary spaces. High-efficiency LED technology, with its homogeneous light distribution and different color temperature options, is an optimal solution for meeting a wide range of indoor lighting needs. Its long-lasting structure, compatibility with automation systems, and elegant aluminum body make it the ideal solution for both residential and commercial projects.

Optical Beam Angles

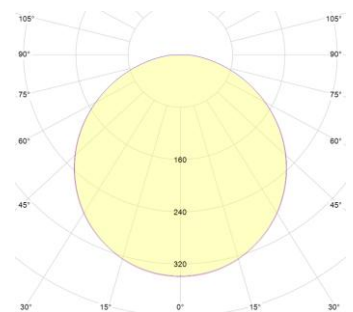

120°

COVE LED


Technical Specifications

Body	:Aluminum Extrusion
IP Protection Class	:IP 20
Luminous Flux	:1800 lm
Light source	:LED
Test Standards	:TS EN 60598TS, EN 60529, TS EN 62031TS, EN 62262, TS IEC TR 62471TS, EN 62722-2-1

Optical and Electrical Properties

Power	15W	Light Angle	110°
CE Marking	Yes	Power Factor	-
Optics	PMMA / PC	Max Tensile Strength	-
Effectiveness Factor	>120 lm/W	Color Temperature	3000K/4000K/6500K
Input Voltage	24V DC	CRI	>80
Total Harmonic Distortion	-	Dimensions	1000x25x8mm
Wavelength	Red 625nm - Green 525nm - Blue 465nm - Amber 590nm	Weight	200 GR

Technical Drawing

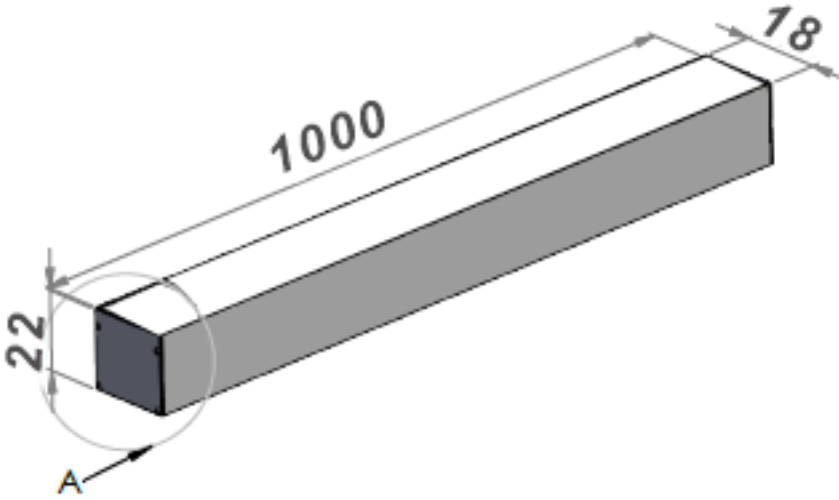

Product Variations

Product Code	Power	Input Voltage	CCT	Luminous Flux	Light Angle	Dimensions	Weight	Usage Area
CVL-015CV-01201-830-9016	15W	24V DC	2200K/2700K/3000K/4000K/6500K	1800lm	120°	1000x25x8mm	200 gr	Hidden Lighting