


Elegance Market Light Fixture 36W



General Application Areas

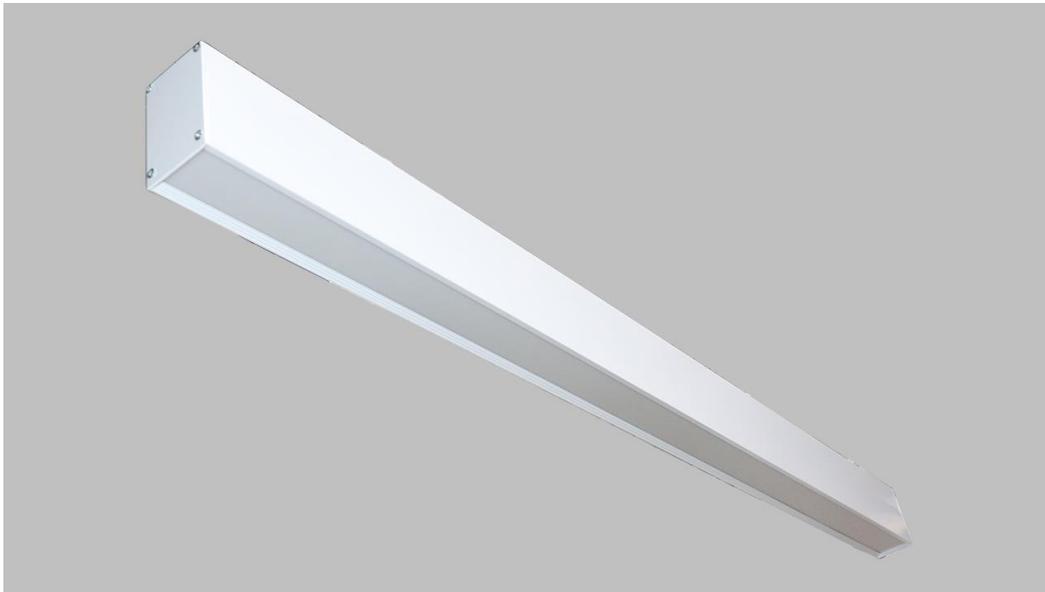

Markets



Factories



Sports
Centers




Airports



Office

Optical Beam Angles

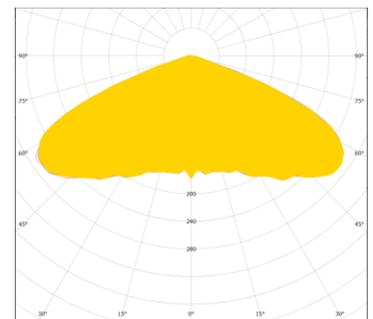

120°

General Information

Elegance Series Market Lighting Fixture is designed to replace traditional products with fluorescent light source in convenience stores, industrial plants, warehouses and sports facilities with ceiling heights from 2.5m to 6 meters.

LED light source food lighting fixtures showcase your products at their best, highlighting their colors and textures to make them look fresh, delicious, and appealing. It has been determined that UV or color enhancing filters are not effective in preventing food from changing color, but our fixtures designed with LED technology display your food in the most effective way without being exposed to UV or infrared rays. In this way, you can appeal to your customers' visual perception, maintain the freshness of your products, and increase your sales.

The better your food looks, the fresher, tastier, more appealing and appetizing it will perceive. Our led food lighting fixtures show your product with the best color rendering rate. It allows you to present it in a way that you can almost taste by highlighting its colors and textures. In this way, by appealing to the visual perception of your customers, you can ensure that your customers buy even products that are not on their list, and increase your turnover.

Elegance Market Light Fixture

36W


Technical Specifications

Body	:Aluminum Extrusion
IP Protection Class	:IP 40
Luminous Flux	:2738 lm
Light Source	:LED
Testing Standards	:TS EN 60598TS, EN 60529, TS EN 62031TS, EN 62262, TS IEC TR 62471TS, EN 62722-2-1

Optical and Electrical Properties

Power	36W	Light Angle	120°
CE Marking	Yes	Power Factor	>0,9
Optics	PMMA / PC	Max Tensile Strength	1kV
Effectiveness Factor	76 lm/W	Color Temperature	3000K/4000K/5000K/6500K
Input Voltage	200-240 V AC 50/60 HZ	CRI	>80
Total Harmonic Distortion	<%15	Input Voltage	200-240 V AC 50/60 HZ
Dimensions	1200x55x86 mm	Weight	4.2 kg

Technical Drawing (Side View) and Wiring Diagram

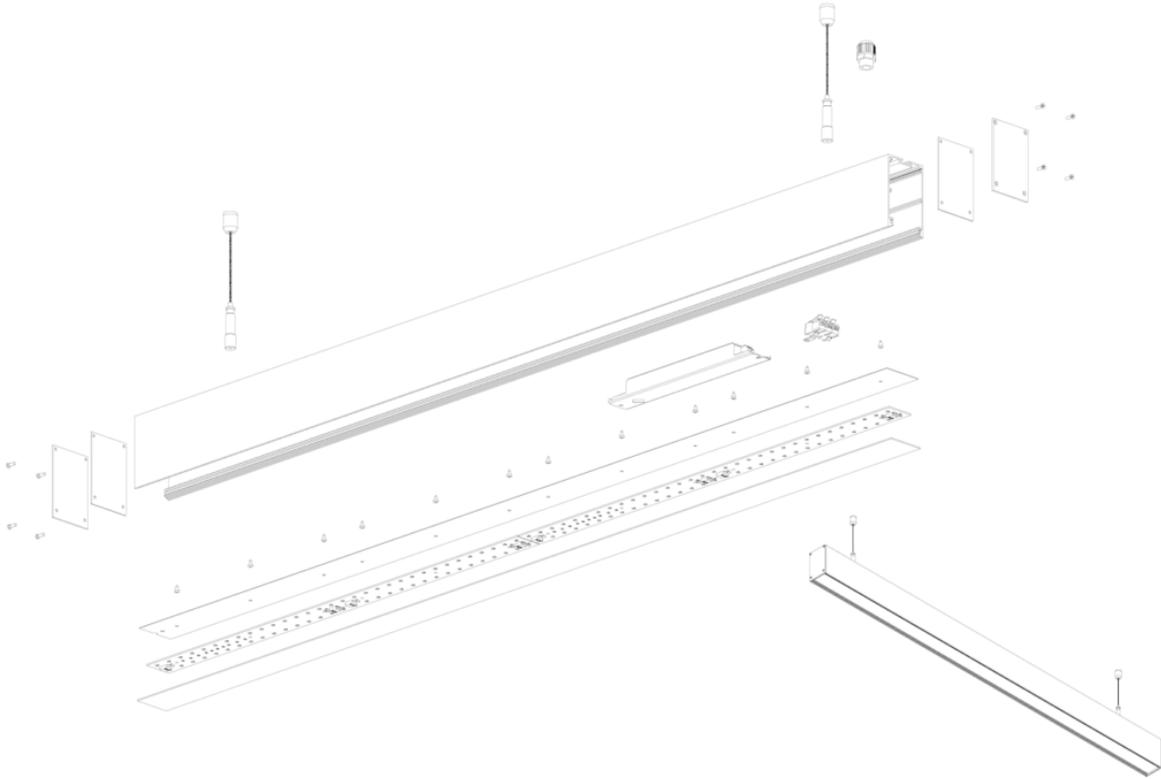

Product Variations

Product Code	Power	Input Voltage	CCT	Luminous Flux	Light Angle	Dimensions	Weight	Usage Area
ELW-036SM-01201-7016	36W	200-240 V AC 50/60 Hz	4000K/5000K/6500K	2738lm	120°	1200x55x86 mm	4.2 kg	Sıva Üstü
ELW-036PM-01201-7016	36W	200-240 V AC 50/60 Hz	4000K/5000K/6500K	2738lm	120°	1200x55x86 mm	4.2 kg	Sarkit